


MODEL 2113



ROW COVER LAYER

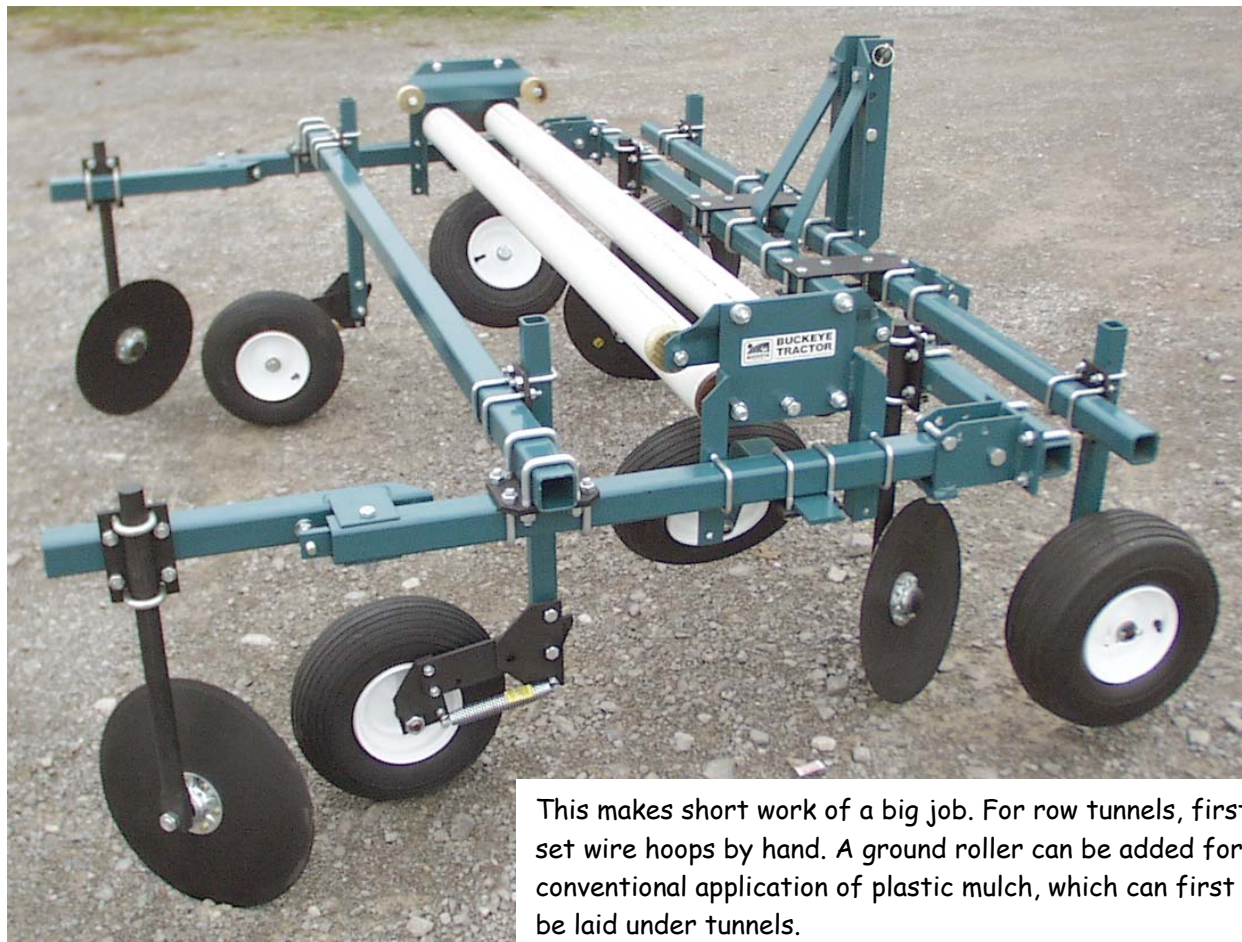

This makes short work of a big job. For row tunnels, first set wire hoops by hand. A ground roller can be added for conventional application of plastic mulch, which can first be laid under tunnels.

Solutions for --

Crop protection

Mulch application on beds up to 12" high

- Fully adjustable
- Category-1 Hitch
- Maximum 6-ft material width - wider available
- Extra-high clearance available
- Heavy-duty model 4313 also available



Row tunnel application may involve working in tractor wheel tracks. Model 2313-T features a heavier hitch and front tillage shanks to loosen wheel track compaction ahead of opening disks. These features can be retro-fitted to 2113.