


2125-TBL 4125-TBL

The 'L' Models are simply set-up opposite the right-hand models for double drip lines, less than 30" spacing.



Use (1) 2125-TB and (1) 2125-TBL or (1) 4125-TB and (1) 4125-TBL to install two tape lines for two, three or four row crops. These also feature spool shafts and spool nuts with left-hand thread. Spool shafts point to the rear to set tape rolls close together.

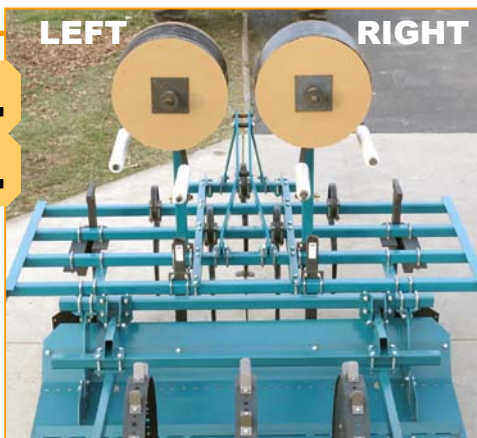

Model 1925-T is a simple post and rotating shaft with mounting hardware for combined installations on Junior Series equipment. This economical choice is practical for low-speeds on short rows.

- No roll brake
- Right-hand threaded spool shaft
- Clamp asby for rigid mounting on 2" square toolbars

for - 1721 - 1723 - 1912 - 1921 - 1923

Options

Part numbers are itemized on price list



16861 Tape Roll Caps

for - 1925 - 2115 - 2125


Roll caps ensure tape won't slip over end of new rolls. These are standard equipment on 4125, 6115, 6215.



16684 Hand Crank Winder Conversion Pkg

for - 1925 - 2115 - 2125 - 4125

Convert your Roll Support to a Hand-Crank Winder to roll-up plastic mulch or drip tape after harvest. On models with Automatic Brake, first loosen brake belt.

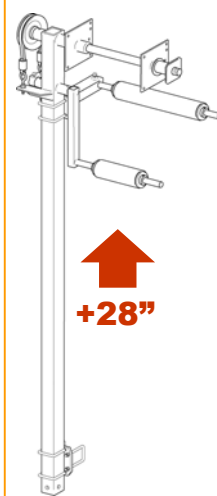

18293 Roll Support Post, Extra-Tall

for - 2115 - 2125 - 4125

Multi-row applicators with close row spacing can be set-up many ways. Offset applicators are most practical, but if toolbar space is limited, equip with a tall post for upper-tier roll support. See photo below.

COMBINED SET-UPS



CUSTOM SET-UPS

