


Two / Three / Four-Wheel Plumbing & Timing Bar Pkgs

NUMBER	PLUMBING FOR TOTAL WHEELS	APPLICATION
19762	2	for 1716 - 1816 - 2216 - 2326 - 4416 - 4626
19763	3	for 1716 - 1816 - 2216 - 2326 - 4416 - 4626
19764	4	for 2216 - 2326 - 4416 - 4626

Plumbing for one wheel included with base planter model

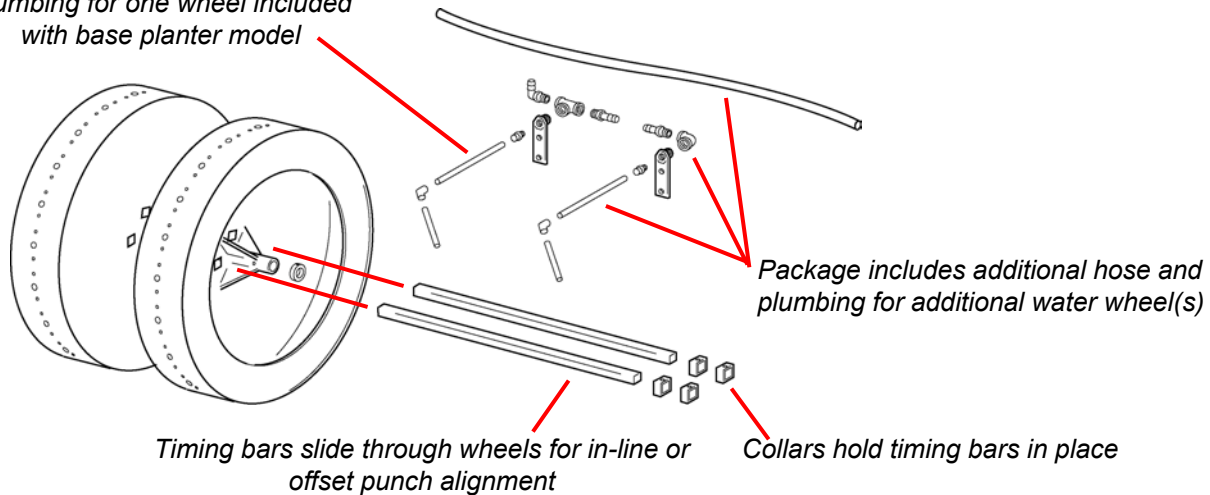

Spec Summary

	1716	1816	2216	2326	4416	4626
Water capacity	65 gal		130 gal		165 gal	250 gal
Tank configuration	single		single	twin	single	twin
Standard tray capacity	5	10	10	10	20	32
Optional tray capacity	10	-	20	20	30	42
Standard seats	1	2	2	2	2	2
Optional seats	2	-	3 or 4	3 or 4	3 or 4	3 or 4
Wheel track adjustment	38-84"		38-84"		60-84"	60-84"
Gauge wheels	Integral hub		4-bolt		5-bolt	6-bolt
Front toolbar	3x3		4x4		dbl 4x4	dbl 4x4
3-point hitch	Cat-1		Cat-1 or 2		Cat-2*	Cat-2*

* Quick-hitch compatible

Buyer's guide

Model choice is primarily about tank size. Fresh-market farms with shorter rows tend to make a full round with 130 gallon and return to the water source. Larger tanks support longer rows and/or additional rounds. Calculation of water use depends on row length, number of rows, plant spacing and water per plant, typically 1 to 2 cups (16 cups per gallon).

65 gallon models offer lowest investment for smaller farms and are built for tractors with less lifting capacity.

If 3 or 4 seats are needed, these are available on 130 gal models and up.

Planters are also available without tank and plumbing.

Complete Water Wheel Planter =
Planter Model + Water Wheel(s) + Plant Punches (as needed)
 + Plumbing and Timing Bar Package (if needed)