



Relieve soil compaction

Maximize water absorption in furrows

Maximum 12" deep - or plow depth

Maximum 25 PTO-HP per shank

Rugged 4" square toolbars

DEEP FRACTURE


5480-3

Buckeye Tractor is your source for heavy one-bed primary tillage equipment. Rippers provide clean, no-mix fracture in the tilled soil layer to 12" deep - down to plow level - without soil inversion (like plows) and without mixing residue (like chisel plows). Adjust shank spacing to optimize full-profile fracture in different soils or to place for zone fracture. A 2-shank Ripper is ideal to loosen raised bed furrows or to set-up a bed lifter.

All models feature heavy 4" square toolbars and shear-bolt shank protection for primary tillage use. Model 5480 is available with 1, 2 or 3 shanks. Model 5680 is available with 4 or 5 shanks.

Integrated applications

Ripper shanks are often installed on other types of equipment for zone fracture. We have shank choices with ratings of 15 to 40 HP.

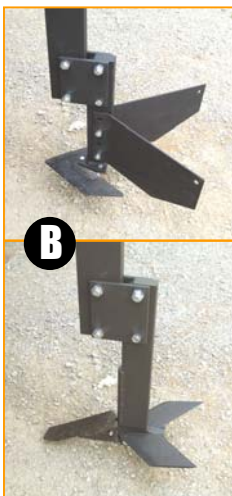

Options / Attachments

- A Coulter Arms & Coulters Blades** for both models
Select components as needed:
 40217 Coulters Arm, Shear-Bolt & Shank, 4sq
 40291 Coulters Arm, Spring-Cushion & Shank, 4sq
 17252 Coulters Blade, 18" Plain
 17551 Coulters Blade, 20" Plain

Install coulters to cut through residue. Both coulters models feature heavy duty tapered bearing hubs

- B Shank Attachments / Parts** for both models
Select components as needed:
 19280 Furrow Shank Bottom
 17836 Flat-Mount Sweep, 10"
 18837 Flat-Mount Sweep, 12"
 17676 Furrow Wings
 18589 Ripper Point
 19595 Ripper Wing Set

Horsepower requirement

Maximum 25 PTO-HP rating per shank. Penetration depends on soil hardness.